


可逆电动机 REVERSIBLE MOTORS

■ 40W □ 90mm

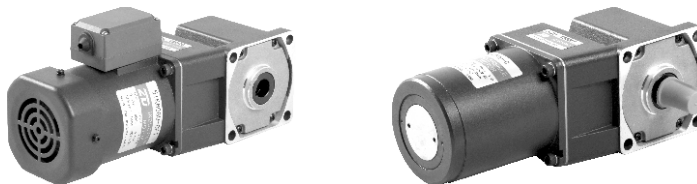

规格 Specs 30分钟额定 30 Minutes Rating


型号Model · 类型 Type 上段:齿轮轴 Upper:Pinion Shaft 下段()内:圆轴 Below:Round Shaft		输出功率 Output power W	电压 Voltage V	频率 Frequency Hz	电流 Current A	启动转矩 Starting Torque mN.m	额定转矩 Rated Torque mN.m	额定转速 Rated Speed r/min	电容器容量 Capacitor μF
导线型 Lead Wire Type 外形图Dimensions①	带端子箱型 Terminal Box Type 外形图Dimensions②								
5RK40GU-A	5RK40GU-AT	40	1ph 100	50	0.78	300	315	1250	15
				60	1.05		260	1550	
5RK40GU-E	5RK40GU-ET	40	1ph 110	60	0.79	260	260	1550	12
			1ph 120		0.80				
5RK40GU-C	5RK40GU-CT	40	1ph 220	50	0.45	270	315	1250	3.0
			1ph 230						
5RK40GU-H	5RK40GU-HT	40	1ph 220	60	0.45	270	260	1550	3.0
			1ph 230						

容许力矩单位 Allowance Torque Unit: 上段 Upside (N.m) / 下段 Belowside (kgf.cm)

机型Type		减速比Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	
电动机/减速器 Motor/Gearhead		转速Speed r/min	50Hz	500	417	300	250	200	166	150	120	100	83	75	60	50	42	30	25	20	16	15	12	10	8	
			60Hz	600	500	360	300	240	200	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	
5RK40GU-A□ 5RK40GU-E□ 5RK40GU-C□ 5RK40GU-H□	5GU□RC 5GU□RT	容许力矩 Allowance Torque	50Hz	0.50	0.60	0.84	1.00	1.58	1.67	1.86	2.63	3.16	3.34	3.71	5.26	6.31	6.80	9.50	11.4	14.2	17.0	18.9	20.0	20.0	20.0	
				4.91	5.89	8.19	9.82	16.1	16.4	18.2	26.8	32.2	32.8	36.4	53.7	64.4	70.0	97.0	116	145	174	193	200	200	200	
			60Hz	0.42	0.50	0.70	0.84	1.27	1.39	1.55	2.12	2.55	2.78	3.09	4.24	5.09	5.50	7.64	9.16	11.5	13.7	15.3	18.3	20.0	20.0	20.0
				4.09	4.91	6.82	8.19	13.0	13.7	15.2	21.6	26.0	27.3	30.3	43.3	51.9	56.1	77.9	93.5	117	140	156	187	200	200	200

电机尺寸图 Motor Size Chart

5RK40GU-A□/5GU□RT 5RK40GU-C□/5GU□RT
5RK40GU-E□/5GU□RT 5RK40GU-H□/5GU□RT

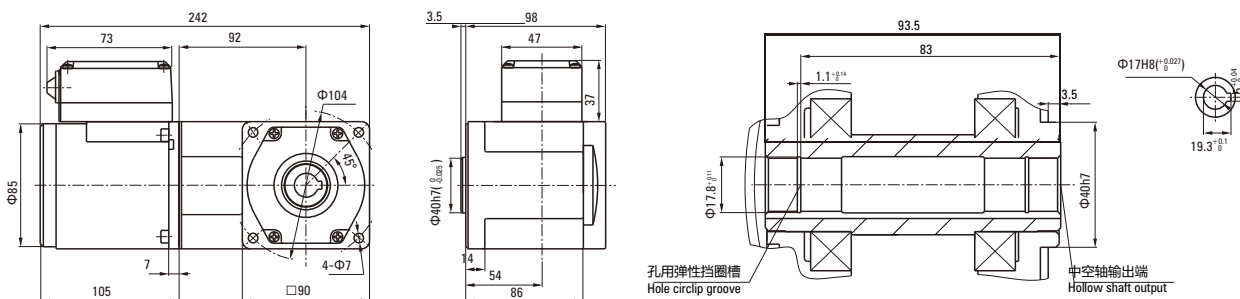

5RK40GU-A□/5GU□RT 5RK40GU-C□/5GU□RT
5RK40GU-E□/5GU□RT 5RK40GU-H□/5GU□RT

