


弧锥直角 SPIRAL BEVEL RIGHT ANGLE

■ 120W □ 104mm



规格 Specs 连续额定 Cont. Rated


型号Model · 类型 Type 导线型 Lead Wire Type	最大 输出功率 Output power W	电压 Voltage V	频率 Frequency Hz	调速范围 Speed Control Range r/min	容许转矩 Allowance Torque		启动转矩 Starting Torque mN.m	电流 Current A	电容器容量 Capacitor μF
					1200r/min mN.m	90r/min mN.m			
6IK120RGU-AF	120	1ph 100	50	90~1400	750	360	530	2.10	30
			60	90~1700				2.50	
6IK120RGU-EF	120	1ph 110	60	90~1700	750	360	520	1.70	20
		1ph 120						1.80	
6IK120RGU-CF	120	1ph 220	50	90~1400	750	330	530	0.95	8.0
		1ph 230							
6IK120RGU-HF	120	1ph 220	60	90~1700	750	360	530	0.95	8.0
		1ph 230						1.00	

容许力矩单位 Allowance Torque Unit: 上段 Upside (N.m) / 下段 Belowside (kgf.cm)

机型Type		减速比Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	
电动机/减速器 Motor/Gearhead		转速Speed r/min	50Hz	500	417	300	250	200	166	150	120	100	83	75	60	50	42	37	30	25	20	16	15	12	10	8	
			60Hz	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	
6IK120RGU-AF□ 6IK120RGU-EF□ 6IK120RGU-CF□ 6IK120RGU-HF□	6GU□RC 6GU□RT	容许力矩 Allowance Torque	50Hz	1.50	1.80	2.51	3.01	4.26	5.01	5.57	7.89	9.47	10.0	11.14	15.8	18.9	20.1	22.3	28.4	34.1	42.6	51.1	56.8	60.0	60.0	60.0	
				14.7	17.7	24.6	29.5	43.5	49.1	54.6	80.5	96.6	98.3	109	161	193	196	218	290	348	435	522	580	600	600	600	
			60Hz	1.25	1.50	2.09	2.51	3.44	4.18	4.64	6.36	7.64	8.35	9.28	12.7	15.3	16.7	18.6	22.9	27.5	34.4	41.2	45.8	55.0	60.0	60.0	60.0
				12.3	14.7	20.5	24.6	35.1	40.9	45.5	64.9	77.9	81.9	91.0	130	156	164	182	234	280	351	421	467	561	600	600	600

电机尺寸图 Motor Size Chart

6IK120RGU-AF□/6GU□RC 6IK120RGU-CF□/6GU□RC
6IK120RGU-EF□/6GU□RC 6IK120RGU-HF□/6GU□RC

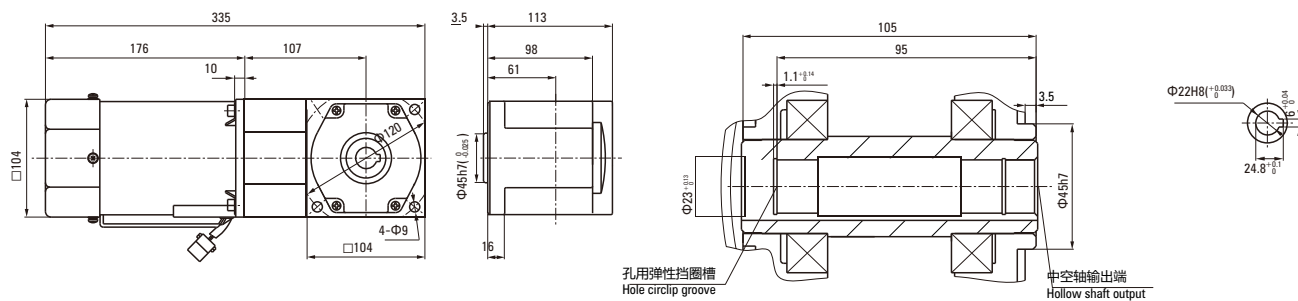

6IK120RGU-AF□/6GU□RT 6IK120RGU-CF□/6GU□RT
6IK120RGU-EF□/6GU□RT 6IK120RGU-HF□/6GU□RT

