


210有刷驱动轮 210 BRUSHED DRIVE WHEEL

■ Z130D650-24A1-26.5S-Q/NL-210-001

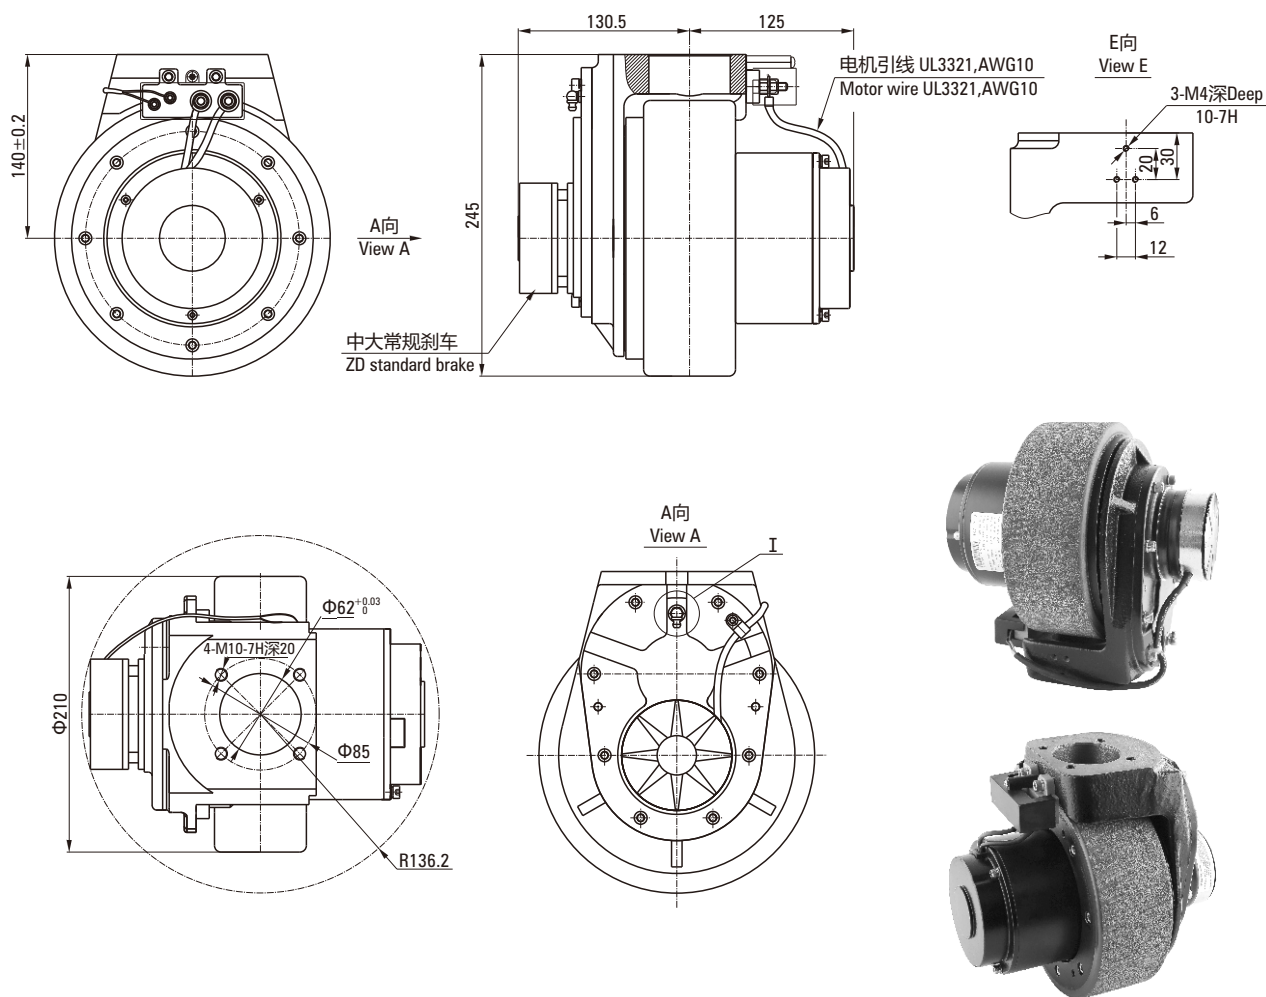

■ 电机基本性能参数表 Motor Basic Parameter Table

型号 Type	Z130D650-24A1-26.5S-Q	防护等级 Protection grade	IP44
额定电压 Rated voltage	24V DC	减速器型号 Reducer model	NL-210-001
额定功率 Rated power	650W	减速器速比 Reduction ratio	24.685K/17K
额定电流 Rated current	38A±10%	刹车电压 Brake voltage	24V DC
额定转速 Rated speed	2650rpm±10%	刹车力矩 Brake torque	6N.m
额定力矩 Rated torque	2.34N.m	使用环境温度 Ambient temperature	-10℃~+40℃
空载电流 Noload current	≤11A	噪音 Noise	<65dB(A)(L=100cm)
空载转速 Noload speed	3100rpm±10%	电机接线图 Wire diagram A向 view A	
工作制 Work duty	S2(45min)		
绝缘电阻 Insulation resistance	>20MΩ		
电刷寿命 Brush life	1200h		
电气强度 Electrical strength	660V/S		
绝缘等级 Insulation class	F		