


弧锥直角
SPIRAL BEVEL RIGHT ANGLE

200W 104mm



规格 Specs 连续额定 Cont. Rated


型号Model · 类型 Type 导线型 Lead Wire Type	最大 输出功率 Output power W	电压 Voltage V	频率 Frequency Hz	调速范围 Speed Control Range r/min	容许转矩 Allowance Torque		启动转矩 Starting Torque mN.m	电流 Current A	电容器容量 Capacitor μ F
					1200r/min mN.m	90r/min mN.m			
6IK200RGU-CF	200	1ph 220 1ph 230	50	90~1400	920	500	1000	1.40	10
6IK200RGU-HF	200	1ph 220 1ph 230	60	90~1700	920	500	1000	1.40	10

容许力矩单位 Allowance Torque Unit: 上段 Upside (N.m) / 下段 Belowside (kgf.cm)

机型Type		减速比Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	
电动机/减速器 Motor/Gearhead		转速Speed r/min	50Hz	500	417	300	250	200	166	150	120	100	83	75	60	50	42	37	30	25	20	16	15	12	10	8	
			60Hz	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10	
6IK200RGU-CF□ 6IK200RGU-HF□	6GU□RC 6GU□RT	容许力矩 Allowance Torque	50Hz	2.51	3.01	4.18	5.01	6.27	8.35	9.28	13.9	15.3	16.7	18.6	25.2	30.3	33.4	37.1	50.4	60.0	60.0	60.0	60.0	60.0	60.0	60.0	
				24.6	29.5	40.9	49.1	61.4	81.9	91.0	142	150	164	182	257	309	327	364	515	600	600	600	600	600	600	600	
			60Hz	2.09	2.51	3.48	4.18	5.80	6.96	7.74	11.2	12.8	13.9	15.5	20.3	24.4	27.9	30.9	40.7	48.8	60.0	60.0	60.0	60.0	60.0	60.0	60.0
				20.5	24.6	34.1	40.9	56.9	68.2	75.8	115	125	136	152	207	249	273	303	415	498	600	600	600	600	600	600	600

电机尺寸图 Motor Size Chart

6IK200RGU-CF□/6GU□RC
6IK200RGU-HF□/6GU□RT

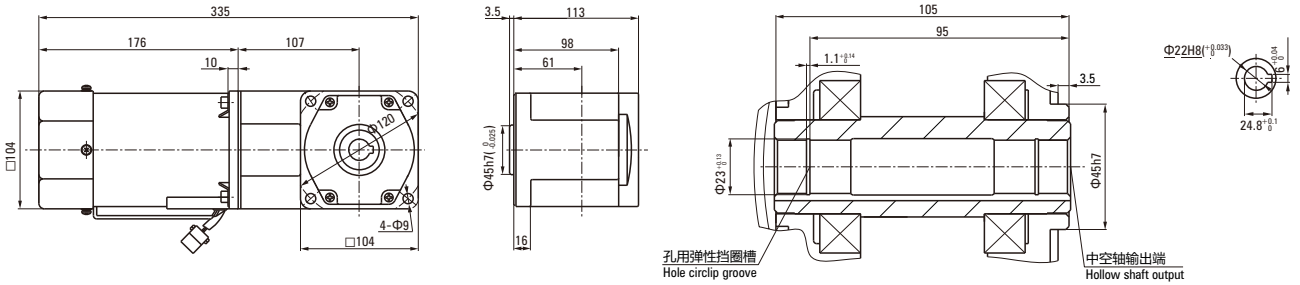

6IK200RGU-CF□/6GU□RT
6IK200RGU-HF□/6GU□RT

