


调速电动机 SPEED CONTROL MOTOR

■ 25W □ 80mm



规格 Specs 连续额定 Cont. Rated


型号Model · 类型 Type 导线型 Lead Wire Type	最大 输出功率 Output power W	电压 Voltage V	频率 Frequency Hz	调速范围 Speed Control Range r/min	容许转矩 Allowance Torque		启动转矩 Starting Torque mN.m	电流 Current A	电容器容量 Capacitor μF
					1200r/min mN.m	90r/min mN.m			
4IK25RGN-A	25	1ph 100	50	90~1400	190	47	88	0.50	8.0
			60	90~1700				0.55	
4IK25RGN-E	25	1ph 110	60	90~1700	190	50	105	0.45	7.0
		1ph 120						0.50	
4IK25RGN-C	25	1ph 220	50	90~1400	190	47	88	0.25	1.8
		1ph 230						0.23	
4IK25RGN-H	25	1ph 220	60	90~1700	190	45	88	0.23	1.8
		1ph 230							

容许力矩单位 Allowance Torque

机型Type 电动机/减速器 Motor/Gearhead		减速比Gear Ratio	3	5	7.5	9	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180
转速度 r/min	50Hz	60Hz	500	300	200	166	150	120	100	83	75	60	50	42	30	25	20	16	15	12	10	8
			600	360	240	200	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10
容许力矩 Allowance Torque	50Hz	60Hz	0.31	0.52	0.99	1.04	1.16	1.64	1.97	2.09	2.32	3.29	3.95	4.73	6.58	7.10	8.00	8.00	8.00	8.00	8.00	8.00
			3.07	5.12	10.1	10.2	11.37	16.8	20.1	20.5	22.74	33.5	40.3	48.3	67.1	72.5	80.0	80.0	80.0	80.0	80.0	80.0
4IK25RGN-A□ 4IK25RGN-E□ 4IK25RGN-C□ 4IK25RGN-H□	4GN□RC 4GN□RT	容许力矩 Allowance Torque	50Hz	60Hz	0.26	0.44	0.80	0.87	0.97	1.33	1.59	1.74	1.93	2.65	3.18	3.82	5.30	5.73	7.16	8.00	8.00	8.00
					2.56	4.26	8.12	8.53	9.48	13.5	16.2	17.1	18.95	27.1	32.5	39.0	54.1	58.4	73.0	80.0	80.0	80.0

电机尺寸图 Motor Size Chart

4IK25RGN-A□/4GN□RC	4IK25RGN-C□/4GN□RC
4IK25RGN-E□/4GN□RC	4IK25RGN-H□/4GN□RC

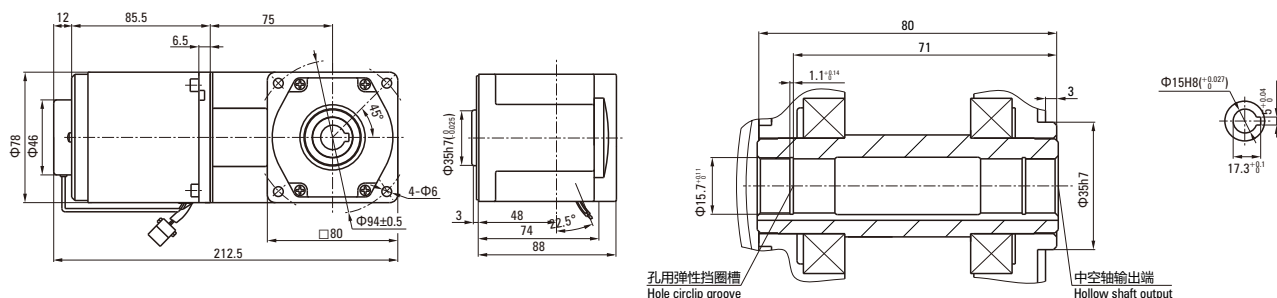

4IK25RGN-A□/4GN□RT	4IK25RGN-C□/4GN□RT
4IK25RGN-E□/4GN□RT	4IK25RGN-H□/4GN□RT

