


调速电动机 SPEED CONTROL MOTOR

■60W □90mm



规格 Specs 连续额定 Cont. Rated


型号Model · 类型 Type 导线型 Lead Wire Type	最大 输出功率 Output power W	电压 Voltage V	频率 Frequency Hz	调速范围 Speed Control Range r/min	容许转矩 Allowance Torque		启动转矩 Starting Torque mN.m	电流 Current A	电容器容量 Capacitor μF
齿轮轴型 Pinion Shaft					1200r/min mN.m	90r/min mN.m			
5IK60RGU-AF	60	1ph 100	50	90~1400	460	140	265	1.00	20
			60	90~1700	490	160		1.10	
5IK60RGU-EF	60	1ph 110	60	90~1700	490	160	265	0.80	12
		1ph 120						0.85	
5IK60RGU-CF	60	1ph 220	50	90~1400	490	140	265	0.50	4.0
		1ph 230						0.55	
5IK60RGU-HF	60	1ph 220	60	90~1700	490	160	265	0.50	4.0
		1ph 230						0.55	

容许力矩单位 Allowance Torque Unit

机型Type		减速比Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	
电动机/减速器 Motor/Gearhead		转速Speed r/min	50Hz	500	417	300	250	200	166	150	120	100	83	75	60	50	42	30	25	20	16	15	12	10	8	
			60Hz	600	500	360	300	240	200	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	
5IK60RGU-AF□ 5IK60RGU-EF□ 5IK60RGU-CF□ 5IK60RGU-HF□	5GU□RC 5GU□RT	容许力矩 Allowance Torque	50Hz	0.75	0.90	1.25	1.50	2.37	2.76	3.06	3.95	4.73	5.51	6.13	7.89	9.47	10.2	14.2	17.0	20.0	20.0	20.0	20.0	20.0	20.0	
				7.37	8.84	12.3	14.7	24.2	27.0	30.0	40.3	48.3	54.0	60.0	80.5	96.6	104	145	174	200	200	200	200	200	200	
			60Hz	0.63	0.75	1.04	1.25	1.91	2.30	2.55	3.18	3.82	4.59	5.11	6.36	7.64	8.25	11.5	13.7	17.2	20.0	20.0	20.0	20.0	20.0	20.0
				6.14	7.37	10.2	12.3	19.5	22.5	25.0	32.5	39.0	45.0	50.0	64.9	77.9	84.1	117	140	175	200	200	200	200	200	200

电机尺寸图 Motor Size Chart

5IK60RGU-AF□/5GU□RC 5IK60RGU-EF□/5GU□RC	5IK60RGU-CF□/5GU□RC 5IK60RGU-HF□/5GU□RC
--	--

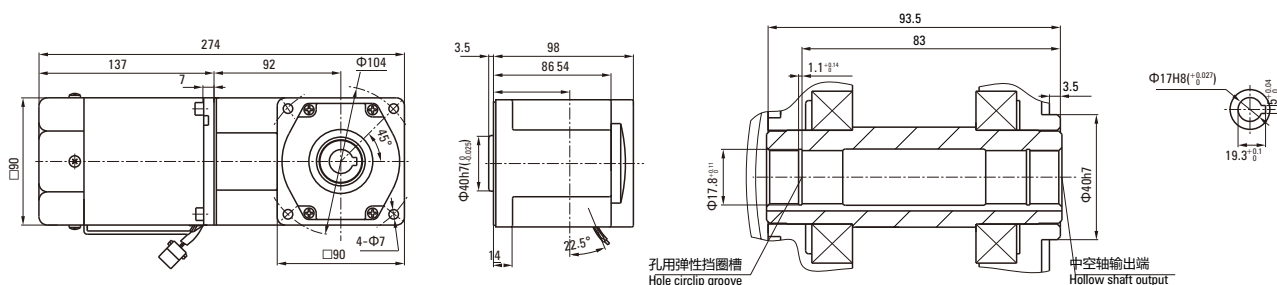

5IK60RGU-AF□/5GU□RT 5IK60RGU-EF□/5GU□RT	5IK60RGU-CF□/5GU□RT 5IK60RGU-HF□/5GU□RT
--	--

