


调速电动机 SPEED CONTROL MOTOR

■ 90W □ 90mm



规格 Specs 连续额定 Cont. Rated


型号 Model · 类型 Type 导线型 Lead Wire Type	最大 输出功率 Output power W	电压 Voltage V	频率 Frequency Hz	调速范围 Speed Control Range r/min	容许转矩 Allowance Torque		启动转矩 Starting Torque mN.m	电流 Current A	电容器容量 Capacitor μF
					1200r/min mN.m	90r/min mN.m			
5IK90RGU-AF	90	1ph 100	50	90~1400	710	230	405	1.55	25
			60	90~1700		260		1.85	
5IK90RGU-EF	90	1ph 110	60	90~1700	710	260	410	1.40	20
		1ph 120						1.45	
5IK90RGU-CF	90	1ph 220	50	90~1400	710	230	410	0.72	5.0
		1ph 230						0.70	
5IK90RGU-HF	90	1ph 220	60	90~1700	710	260	410	0.71	5.0
		1ph 230						0.75	

容许力矩单位 Allowance Torque Unit: 上段 Upside (N.m) / 下段 Belowside (kgf.cm)

机型Type 电动机/减速器 Motor/Gearhead	减速比Gear Ratio	转速Speed r/min	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180
			50Hz	417	300	250	200	166	150	120	100	83	75	60	50	42	30	25	20	16	15	12	10	8
5IK90RGU-AF□ 5IK90RGU-EF□ 5IK90RGU-CF□ 5IK90RGU-HF□	容许力矩 Allowance Torque	50Hz	1.13	1.35	1.88	2.26	3.55	3.76	4.18	5.92	7.10	7.52	8.35	11.8	14.2	15.3	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
			11.1	13.3	18.4	22.1	36.2	36.8	40.9	60.4	72.5	73.7	81.9	121	145	157	200	200	200	200	200	200	200	200
		60Hz	0.94	1.13	1.57	1.88	2.86	3.13	3.48	4.77	5.73	6.27	6.96	9.54	11.5	12.4	17.2	20.0	20.0	20.0	20.0	20.0	20.0	20.0
			9.21	11.1	15.4	18.4	29.2	30.7	34.1	48.7	58.4	61.4	68.2	97.4	117	126	175	200	200	200	200	200	200	200

电机尺寸图 Motor Size Chart

5IK90RGU-AF□/5GU□RC 5IK90RGU-CF□/5GU□RC
5IK90RGU-EF□/5GU□RC 5IK90RGU-HF□/5GU□RC

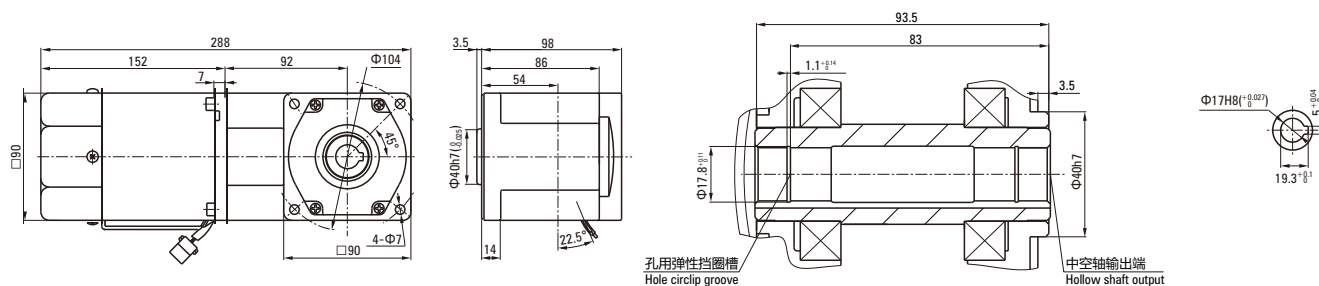

5IK90RGU-AF□/5GU□RT 5IK90RGU-CF□/5GU□RT
5IK90RGU-EF□/5GU□RT 5IK90RGU-HF□/5GU□RT

