


弧锥直角 SPIRAL BEVEL RIGHT ANGLE

140W 104mm



规格 Specs 连续额定 Cont. Rated


型号Model · 类型 Type 导线型 Lead Wire Type	最大 输出功率 Output power W	电压 Voltage V	频率 Frequency Hz	调速范围 Speed Control Range r/min	容许转矩 Allowance Torque		启动转矩 Starting Torque mN.m	电流 Current A	电容器容量 Capacitor μ F
					1200r/min mN.m	90r/min mN.m			
6IK140RGU-AF 齿轮轴型 Pinion Shaft	140	1ph 100	50	90~1400	830	420	620	2.70	35
			60	90~1700				3.00	
6IK140RGU-EF	140	1ph 110	60	90~1700	830	450	620	1.80	25
		1ph 120						1.95	
6IK140RGU-CF	140	1ph 220	50	90~1400	830	420	620	1.05	10
		1ph 230						1.15	
6IK140RGU-HF	140	1ph 220	60	90~1700	830	450	620	1.05	10
		1ph 230						1.15	

容许力矩单位 Allowance Torque Unit: 上段 Upside (N.m) / 下段 Belowside (kgf.cm)

机型Type 电动机/减速器 Motor/Gearhead		减速比Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180
		转速Speed r/min	50Hz	500	417	300	250	200	166	150	120	100	83	75	60	50	42	37	30	25	20	16	15	12	10	8
			60Hz	600	500	360	300	240	200	180	144	120	100	90	72	60	50	45	36	30	24	20	18	15	12	10
6IK140RGU-AF□ 6IK140RGU-EF□ 6IK140RGU-CF□ 6IK140RGU-HF□	容许力矩 Allowance Torque	50Hz	1.75	2.11	2.92	3.01	4.97	5.85	6.5	9.21	11.0	11.7	13.0	18.4	22.1	23.4	26.0	33.1	39.8	49.7	59.6	60.0	60.0	60.0	60.0	
			17.2	20.6	28.7	29.5	50.7	57.3	63.7	93.9	113	115	127	188	225	229	255	338	406	507	600	600	600	600		
		60Hz	1.46	1.75	2.44	2.92	4.01	4.87	5.41	7.42	8.91	9.75	10.8	14.8	17.8	19.5	21.7	26.7	32.1	40.1	48.1	53.4	60.0	60.0	60.0	
			14.3	17.2	23.9	28.7	40.9	47.8	53.1	75.8	90.9	95.5	106.1	152	182	191	212	273	327	409	491	545	600	600	600	

电机尺寸图 Motor Size Chart

6IK140RGU-AF□/6GU□RC 6IK140RGU-EF□/6GU□RC	6IK140RGU-CF□/6GU□RC 6IK140RGU-HF□/6GU□RC
--	--

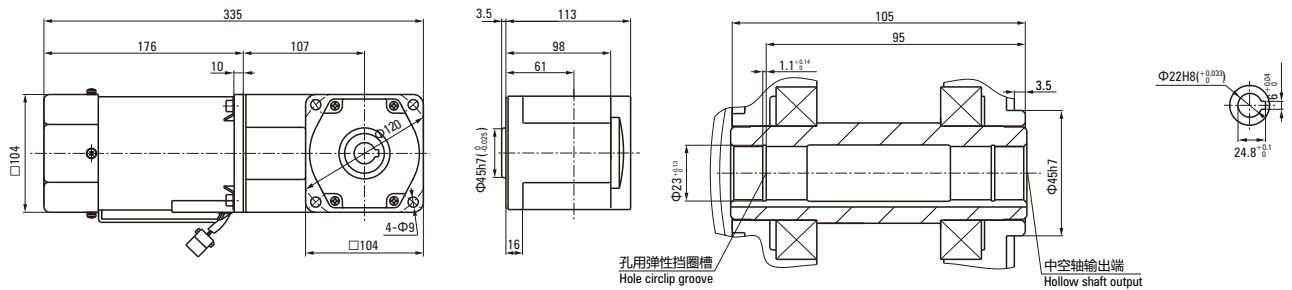

6IK140RGU-AF□/6GU□RT 6IK140RGU-EF□/6GU□RT	6IK140RGU-CF□/6GU□RT 6IK140RGU-HF□/6GU□RT
--	--

