


可逆电动机 REVERSIBLE MOTORS

■ 90W □ 90mm

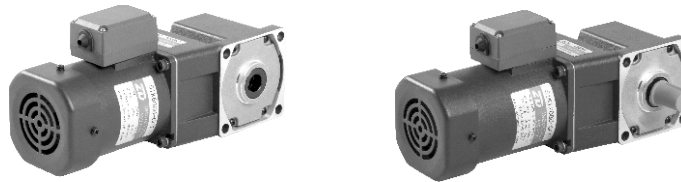

■ 规格 Specs 30分钟额定 30 Minutes Rating



型号Model · 类型 Type 上段:齿轮轴 Upper:Pinion Shaft 下段():内:圆轴 Below:Round Shaft		输出功率 Output power W	电压 Voltage V	频率 Frequency Hz	电流 Current A	启动转矩 Starting Torque mN.m	额定转矩 Rated Torque mN.m	额定转速 Rated Speed r/min	电容器容量 Capacitor μF
导线型 Lead Wire Type 外形图Dimensions①	带端子箱型 Terminal Box Type 外形图Dimensions②								
5RK90GU-AF	5RK90GU-AFT	90	1ph 100	50	1.78	600	700	1250	30
				60	2.35		570	1550	
5RK90GU-EF	5RK90GU-EFT	90	1ph 110	60	1.72	550	570	1550	25
			1ph 120			600			
5RK90GU-CF	5RK90GU-CFT	90	1ph 220	50	0.82	560	700	1250	6.0
			1ph 230		0.81				
5RK90GU-HF	5RK90GU-HFT	90	1ph 220	60	0.81	560	560	1550	6.0
			1ph 230		0.80				

■ 容许力矩单位 Allowance Torque Unit: 上段 Upside (N.m) / 下段 Belowside (kgf.cm)

机型Type		减速比Gear Ratio		3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180	
电动机/减速器 Motor/Gearhead		转速Speed r/min	50Hz	500	417	300	250	200	166	150	120	100	83	75	60	50	42	30	25	20	16	15	12	10	8	
			60Hz	600	500	360	300	240	200	180	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10	
5RK90GU-AF□ 5RK90GU-EF□ 5RK90GU-CF□ 5RK90GU-HF□	5GU□RC 5GU□RT	容许力矩 Allowance Torque	50Hz	1.13	1.35	1.88	2.26	3.55	3.76	4.18	5.92	7.10	7.52	8.35	11.8	14.2	15.3	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	
				11.1	13.3	18.4	22.1	36.2	36.8	40.9	60.4	72.5	73.7	81.9	121	145	157	200	200	200	200	200	200	200	200	
			60Hz	0.94	1.13	1.57	1.88	2.86	3.13	3.48	4.77	5.73	6.27	6.96	9.54	11.5	12.4	17.2	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
				9.21	11.1	15.4	18.4	29.2	30.7	34.1	48.7	58.4	61.4	68.2	97.4	117	126	175	200	200	200	200	200	200	200	200

■ 电机尺寸图 Motor Size Chart

5RK90GU-AF□/5GU□RT 5RK90GU-CF□/5GU□RT
5RK90GU-EF□/5GU□RT 5RK90GU-HF□/5GU□RT

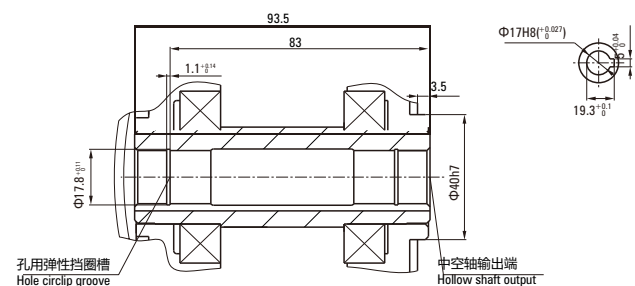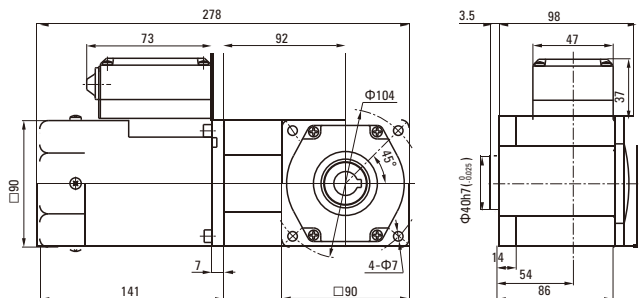

5RK90GU-AF□/5GU□RT 5RK90GU-CF□/5GU□RT
5RK90GU-EF□/5GU□RT 5RK90GU-HF□/5GU□RT

