


50低压无刷电动滚筒
50 PERMANENT MAGNET LOW VOLTAGE BRUSHLESS DRUM MOTOR



50尺寸图 50 Outlining Dimensions

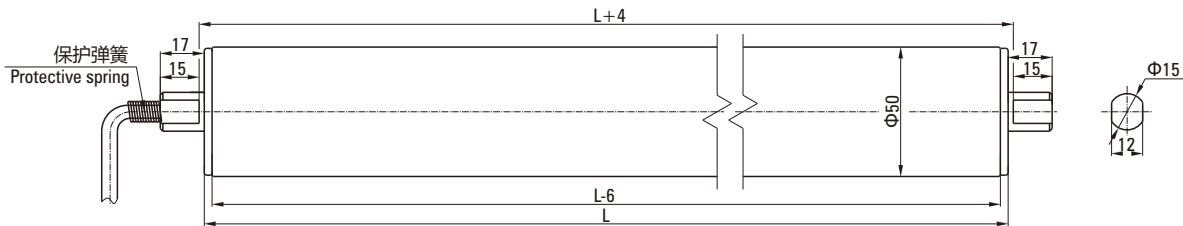

50机械参数 50 Mechanical Parameters

● 低压无刷 Drum Shell (电压 Voltage 24V/48V)

额定功率P Rated Power P W	齿轮箱级数 Gear Box Series	减速比 Reduction Ratio i	线速度 Linear Velocity M/min	额定转速n Rated Speed n RPM	额定扭矩T Rated Torque T Nm	牵引力F Traction F N	长度L Length L mm	皮带线 Belt line mm
40	1	3.65	129.0	821.92	0.42	16.73	270-1500	280-1500
		5.36	87.9	559.70	0.61	24.57		
		6.55	71.9	458.02	0.75	30.03		
		8.63	54.6	347.62	0.99	39.56		
	2	13.53	34.8	221.73	1.40	55.82	285-1500	295-1500
		18.92	24.9	158.56	1.95	78.06		
		24.65	19.1	121.70	2.54	101.70		
		33.92	13.9	88.44	3.50	139.94		
	3	44.69	10.5	67.13	4.61	184.37	300-1500	300-1500
		67.08	7.0	44.72	6.24	249.41		
		91.36	5.2	32.84	8.49	339.69		
		165.64	2.8	18.11	15.40	600.00		