



# 60低压无感无刷电动滚筒

## 60 LOW VOLTAGE NON INDUCTIVE DRUM MOTOR

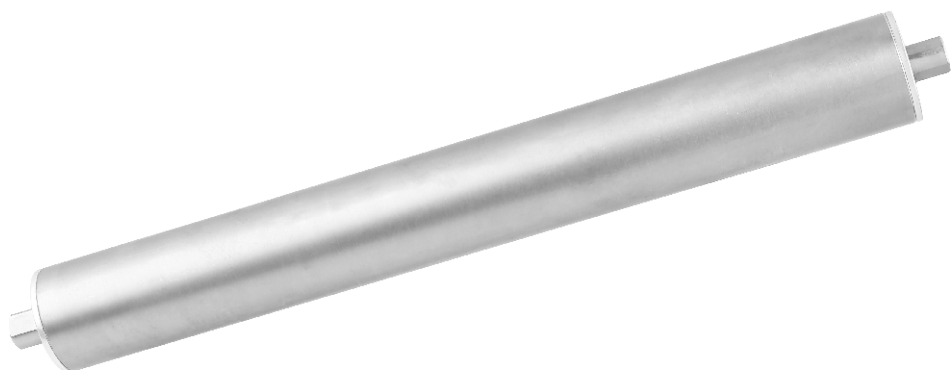

### 60尺寸图 60 Outlining Dimensions

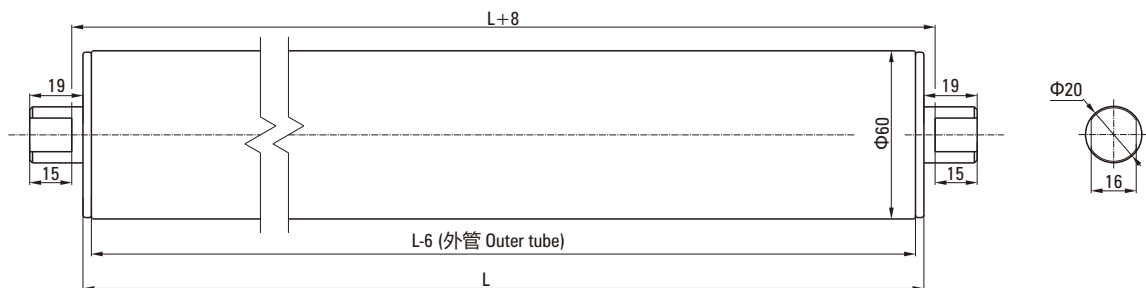

### 60机械参数 60 Mechanical Parameters

● 低压无感 Low Voltage Insensitivity

(电压 Voltage 24V)

| 额定功率P<br>Rated Power P<br>W | 齿轮箱级数<br>Gear Box Series | 减速比i<br>Reduction Ratio<br>i | 线速度<br>Linear Velocity<br>M/min | 额定转速n<br>Rated Speed n<br>RPM | 额定扭矩T<br>Rated Torque T<br>Nm | 牵引力F<br>Traction F<br>N | 长度L<br>Length L<br>mm |
|-----------------------------|--------------------------|------------------------------|---------------------------------|-------------------------------|-------------------------------|-------------------------|-----------------------|
| 90                          | 1                        | 6.75                         | 83.7                            | 444.44                        | 1.57                          | 52.21                   | 300                   |
|                             | 2                        | 13.69                        | 41.3                            | 219.14                        | 3.18                          | 105.90                  | 315                   |
|                             |                          | 19.16                        | 29.5                            | 156.58                        | 4.45                          | 148.21                  |                       |
|                             |                          | 26.83                        | 21.1                            | 111.82                        | 6.23                          | 207.54                  |                       |
|                             |                          | 34.96                        | 16.2                            | 85.81                         | 8.11                          | 270.43                  |                       |
|                             | 3                        | 50.65                        | 11.2                            | 59.23                         | 10.59                         | 353.11                  | 330                   |
|                             |                          | 70.91                        | 8.0                             | 42.31                         | 14.83                         | 494.35                  |                       |
|                             |                          | 99.27                        | 5.7                             | 30.22                         | 20.76                         | 692.06                  |                       |
|                             |                          | 99.27                        | 3.1                             | 16.57                         | 37.88                         | 1262.54                 |                       |