

1500W 配单相电机技术参数



1500W WITH 1-PHASE MOTOR PARAMETERS

■ 卧式 Horizontal



■ 立式 Vertical



■ 卧式 Horizontal

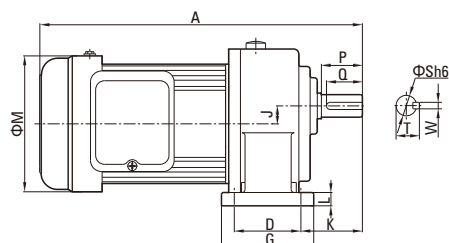



■ 立式 Vertical

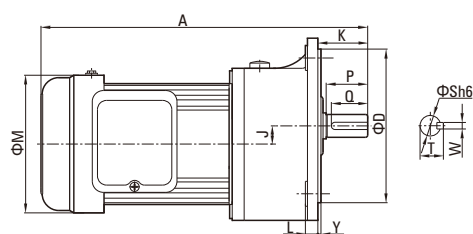



■ 缩框型(3#+5#) Light duty Type(3#+5#)



■ 卧式 Horizontal

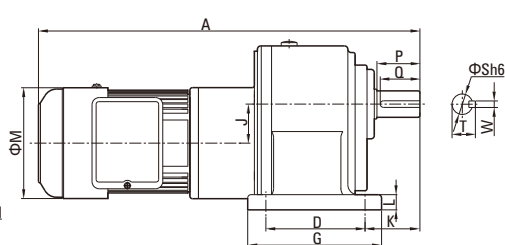

■ 立式 Vertical

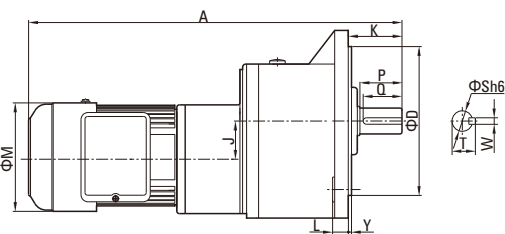

1500W 配单相电机技术参数
1500W WITH 1-PHASE MOTOR PARAMETERS

尺寸表 Size Table

单位 Unit:mm

功率 Power	箱号 Box Number	减速比Ratio	A	D	E	F	G	H	J	K	L	M	X	Y	Z	S	P	Q	W	T	重量Weight
1500W 2HP	3#	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/
		缩框型3-30 Light duty type	418	90(170)	140(220)	178(205)	120(195)	12	23	68(58)	17(13)	192	193(/)	116(3)	139	28	45	40	7	31.1	25.0
	4#	标准型3-30 Standard type	452	130(185)	170(255)	210(239)	165(216)	13	30.0	70(66.5)	18(13)	192	216(/)	138.5(3)	139	32	55	50	10	35.5	36.0
		缩框型40-100 Light duty type	452	130(185)	170(255)	210(239)	165(216)	13	30.0	70(66.5)	18(13)	192	216(/)	138.5(3)	139	32	55	50	10	35.5	36.0
	5#	标准型40-100 Standard type	503	150(230)	210(310)	265(277)	203(255)	15	36	83	20(18)	192	255(/)	160(5)	139	40	65	60	10	43.5	52.0
		缩框型110-150 Light duty type	503	150(230)	210(310)	265(277)	203(255)	15	36	83	20(18)	192	255(/)	160(5)	139	40	65	60	10	43.5	52.0
	6#	标准型110-180 Standard type	560	170(280)	265(390)	335(367)	238(342)	18	51	97(92)	25	192	312(/)	200(5)	146	50	80	75	14	54	94.0

※表中"()"内为立式箱体尺寸.

※Labulation"(/)"denote vertical box dimension.

输出轴容许扭矩 Output Torque

单位 Unit:kg.m

功率 Power	箱号 Box Number	类型 Type	速 频 比 率	3	5	10	15	20	25	30	40	45	50	60	70	80	90	100	120	140	★160	★180	★200
1500W 2HP	3#	标准型 Standard type	50Hz	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/
			60Hz	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/
		缩框型 Light duty type	50Hz	2.50	4.20	8.50	11.2	11.2	11.2	11.2	/	/	/	/	/	/	/	/	/	/	/	/	/
			60Hz	2.10	3.50	7.00	10.4	11.2	11.2	11.2	/	/	/	/	/	/	/	/	/	/	/	/	/
	4#	标准型 Standard type	50Hz	2.50	4.20	8.50	12.7	16.9	21.1	25.4	/	/	/	/	/	/	/	/	/	/	/	/	/
			60Hz	2.10	3.50	7.00	10.4	13.9	17.4	20.9	/	/	/	/	/	/	/	/	/	/	/	/	/
		缩框型 Light duty type	50Hz	/	/	/	/	/	/	/	30.4	34.3	38.1	45.7	51.8	51.8	51.8	51.8	/	/	/	/	/
			60Hz	/	/	/	/	/	/	/	25.1	28.2	31.3	37.6	43.9	50.1	51.8	51.8	/	/	/	/	/
	5#	标准型 Standard type	50Hz	/	/	/	/	/	/	/	30.4	34.3	38.1	45.7	53.3	60.9	68.5	76.1	/	/	/	/	/
			60Hz	/	/	/	/	/	/	/	25.1	28.2	31.3	37.6	43.9	50.1	56.4	62.7	/	/	/	/	/
		缩框型 Light duty type	50Hz	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	82.8	82.8	/	/	/
			60Hz	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	67.7	79.0	/	/	/
	6#	标准型 Standard type	50Hz	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	91.30	106.6	/	/	/
			60Hz	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	75.20	87.80	/	/	/

※备注：★为达到此速此时，必须搭配6P马达使用。※

Note: In order to reach this ratio, must be used 6P motor.